

## Installation and Operating Instructions

# Round flange steel grab rail, 35mm diameter tube



Round flange steel grab rail, 305mm	GR-12/35/XX
Round flange steel grab rail, 455mm	GR-18/35/XX
Round flange steel grab rail, 610mm	GR-24/35/XX
Round flange steel grab rail, 750mm	GR-30/35/XX
Round flange steel grab rail, 915mm	GR-36/35/XX

Colours: White (WH), Dark Blue (DB), Grey (GY), Dark Grey (DG)

**Congratulations on the purchase of your grab rail. This grab rail has been designed to provide users with extra support while moving from one position to another and assists with the independent standing/sitting of persons.**

### Warnings:


- Due to manufacturing tolerances we do not recommend pre-drilling fixing holes before physically receiving this product.
- On receiving delivery of this product, a thorough check must be carried out and any defects immediately reported. The product must be stored in a dry place and not stacked under other equipment.
- The wall on which the rail is installed must be flat and capable of taking the load. An uneven substrate surface or angle may cause anti-ligature design issues.
- Installation must be carried out by a qualified tradesman using suitable fixings for the wall substrate.
- Improper installation / use can cause accidents and injuries.
- Do not over-tighten fixings
- The Max Rated Load of is 150kg (24 stone).
- After installation a functional test must be carried out prior to use.
- These instructions should be retained by the user of the product for its whole life time.
- Never alter the fixing holes as this could affect the strength and integrity of the product.
- This product should not be subjected to impact.
- This product is designed to offer support to the user and should not be used in a way that would apply the users' full weight to the rail.
- Do not use the grab rail for any purpose other than that for which it was designed.
- If in doubt, carry out your own risk assessment per installation / user to ensure risk(s) is/are at an acceptable level.

# Installation and Operating Instructions

## Installation:

**Installation should be carried out by a suitably qualified tradesman using correct fixing for the wall substrate. No fixings are supplied with this product to allow the correct fixing method to be selected for specific installations.**

- 1) Once the correct wall fixing has been selected.
- 2) Offer grab rail up to correct location on the wall and carefully mark the selected hole locations.
- 3) Drill the holes in the wall of a diameter and depth recommended by supplier of wall fixings.
- 4) Always carry out a functional test after installation and report any issues immediately.
- 5) Please leave these instructions with the user.

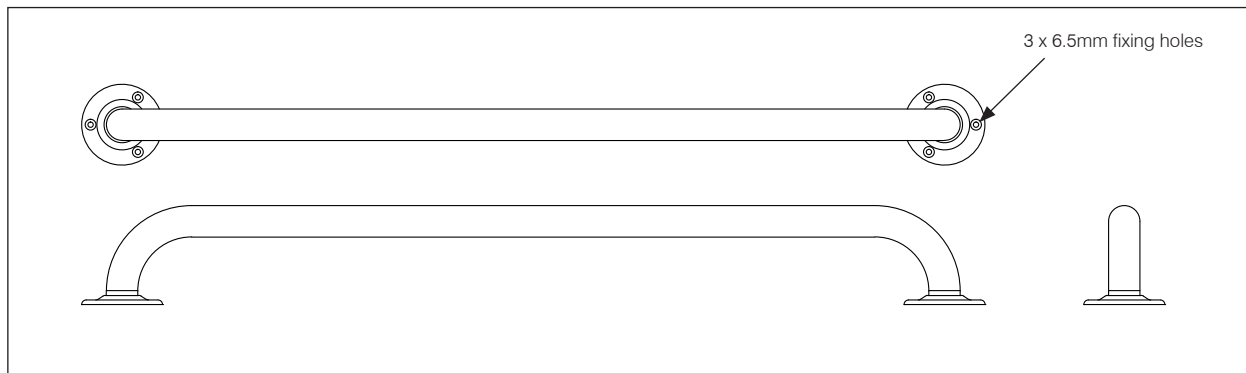

## Using this product:

ALWAYS check this product is fitted securely to the wall and shows no signs of wear or damage prior to use. Please keep these instructions in a safe place for future use.

## Cleaning and maintenance:

This product must be checked regularly by a qualified personnel to ensure that it is in perfect working order. This product can be cleaned using only a very mild detergent. Do not use acidic, alkaline, chlorine based or abrasive cleaning materials.

## Warranty:

The standard of manufacture and quality control allows Nymas to offer warranties on all products. The W symbol denotes the number of years covered if different to the standard 1 year warranty. Nothing is shown on any product information sources if the product is the standard 1 year warranty. Where L appears this means the product is guaranteed for life (terms and conditions apply).

## Disclaimer:

Nymas pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice. The information contained on this document was correct at date of issue and dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances.

We accept no liability whatsoever for personal injury or damage to property that is or has been caused due to incorrect assembly, installation, or use of this product. Failure to install / use this product in line with these instructions will invalidate any warranty and may affect product safety.